



CCR Mini II

Contactless Reader
for Access Control
and Attendance Systems

CCR Mini II is the latest generation of our smallest readers, designed for maximum resistance to environmental conditions and external damage. Its water-resistant design makes it ideal for outdoor installations.

This compact model is the perfect solution for small, confined spaces such as reception areas or turnstiles. CCR Mini II is easy to install on walls, with options for recessed mounting or integration into other devices.

Reliable connectivity with access control and attendance systems is provided by RS 485 and OSDP™ protocol, ensuring seamless integration with third-party systems.



FEATURES

- > High-Security RFID Card Reader for MIFARE® DESFire® Proximity, HID Cards and NFC*
- > LED indicator and internal buzzer for visual and audible status signaling
- > Minimalist and compact design, ideal for small or narrow spaces
- > Controls doors, turnstiles, parking barriers and other access points
- > Hermetically sealed electronics
- > RFID readers are designed, developed and manufactured by CONTAL OK

* HW ready


CCR Mini II

TECHNICAL SPECIFICATIONS

Operating Frequency	13.56 Mhz 125 kHz Proximity version
Power Supply	10-30 VDC
Current Consumption	Max. 50 mA
Protection Rating	IP42
Operating Temperature	-40 °C to +55 °C
Optical indication	RGB
Acoustic indication	built-in buzzer
Dimensions	65 x 46 x 16 mm
Weight	180 g
Color	Black

SPECIFICATION

Certification	CE Mark
Communication	RS 485 with OSDP protocol
Reading Distance	30 mm
Wall Contact	Yes
Material	PC-Polycarbonate

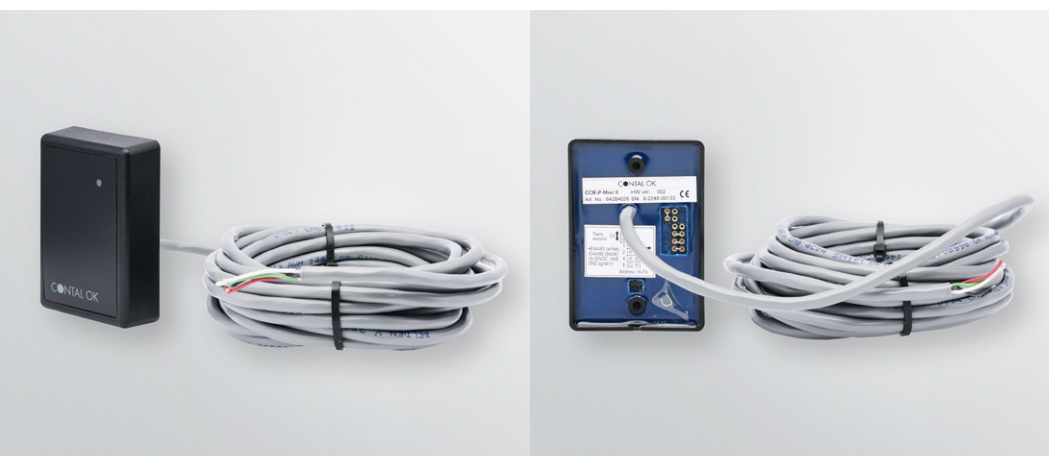

Product Code:

25284030 MIFARE/DESFire 13,56 MHz

25283030 Proximity 125 kHz

25285030 HID 125 kHz



CONTAL OK

contal@contal.sk | +421 41 5052 111

www.contal.sk/en